


# Diamond Series Temperature Rise (TRR)

Exceptional high-temperature protection while meeting regulatory requirements

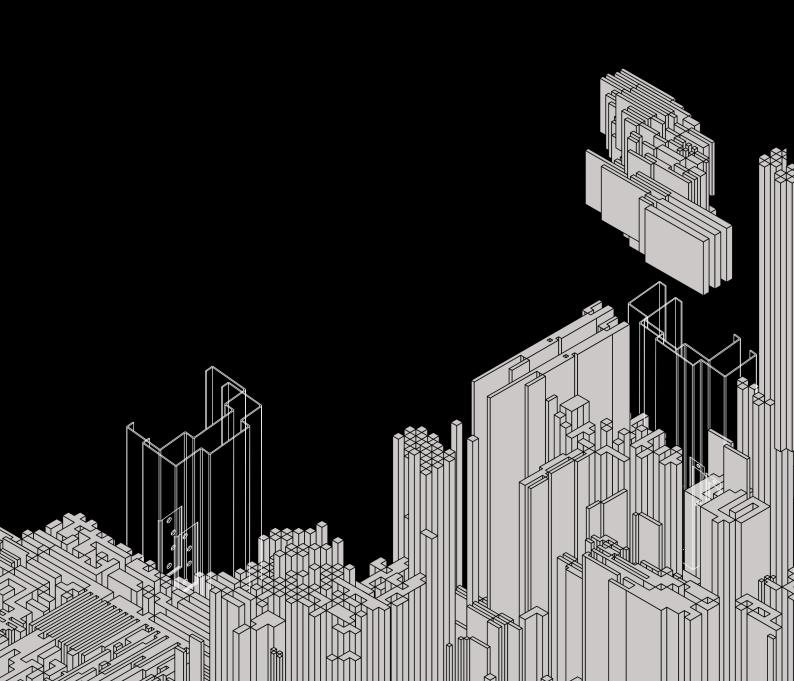

# **DIAMOND SERIES TEMPERATURE RISE (TRR)**

EXCEPTIONAL HIGH-TEMPERATURE PROTECTION WHILE MEETING REGULATORY REQUIREMENTS

Fire Rated \* Up to 3 hours




Thermal Value\* R Value U Value







- **Superior Surface Adhesion**
- **Mechanical Strength.**
- Ideal design for stairwells

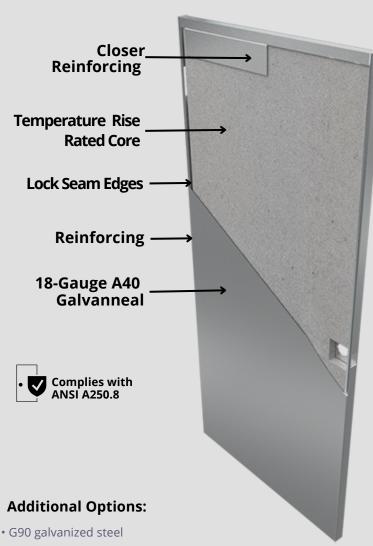

### 1. Durability and Security

Robust Construction: Commercial steel doors are crafted from high-strength steel, ensuring they can endure heavy use and resist impacts. This makes them ideal for hightraffic areas and environments where durability is crucial.

#### 2. Low Maintenance

Resilient Surface: The steel construction resists dents, scratches, and rust, ensuring that the doors maintain their appearance and functionality over time. This durability reduces the need for frequent repairs or replacements.

#### 3. Energy Efficiency

Cost and Environmentally Friendly: By improving energy efficiency, these doors contribute to lower heating and cooling costs, offering long-term savings. Additionally, their energy-efficient design supports environmental sustainability by reducing energy consumption.

#### **Available Ratings**

250°F at 30 minutes (US Standard) 450°F at 60 minutes (US Standard) 250°C at 60 minutes (Canadian Standard)

## Applicable Standards:

- ASTM-E152
- ULC CAN4-S104-M80
- NFPA-252
- UL-10B
- UL-10C
- NFPA-80
- UBC-7-2-94

- 14 or 16-gauge A40 galvanneal steel
- Specialty finishes
- Window and louver cutouts
- Custom sizes and hardware configurations
- 100 Sqinch Vision Lites











