


Double Egress (DE)

Steel Frame Designed for Pair doors

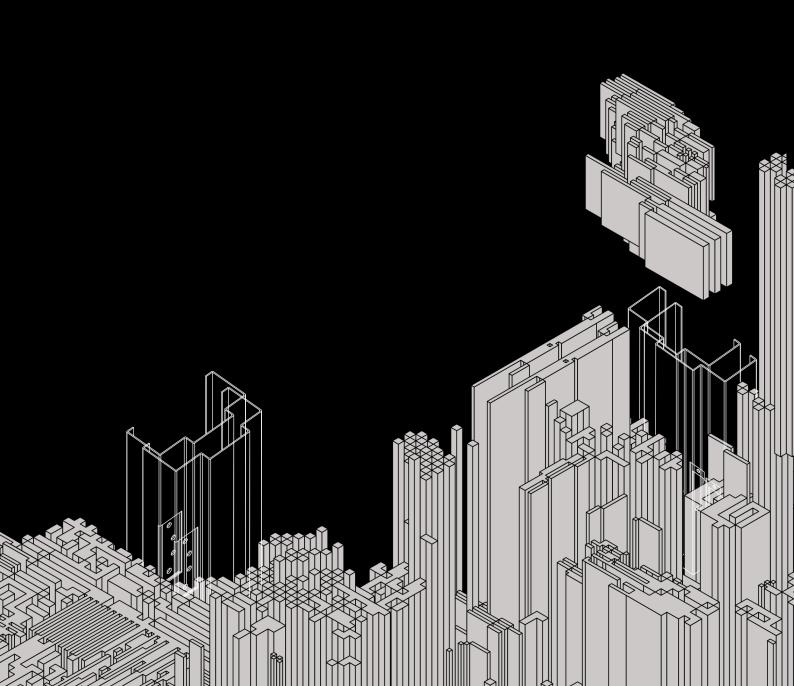

DOUBLE EGRESS (DE)

STEEL FRAME DESIGNED FOR PAIR DOORS






Complies with ANSI A250.8







- Cross Corridor doors
- Expedited Delivery
- For Interior Use

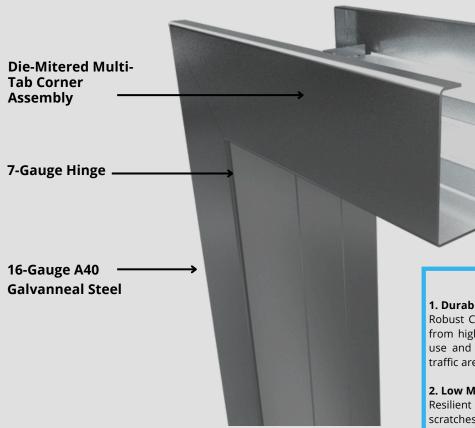

Additional Options:

- Paintable galvanneal
 - (unprimed) finish
- Drywall returns (double backbend)
- Custom faces and electrical preps
- Welded corners (face, profile, continuous)
- 14-Gauge A40 galvanneal steel
- G90 galvanized steel

Applicable Standards:

- ASTM-E152
- CSFM-43.7
- CAN/ULC-S104
- NFPA-252
- UBC-43-2
- UL-10B
- UL 10C
- NFPA-80

1. Durability and Security

Robust Construction: Commercial steel frames are crafted from high-strength steel, ensuring they can endure heavy use and resist impacts. This makes them ideal for hightraffic areas and environments where durability is crucial.

2. Low Maintenance

Resilient Surface: The steel construction resists dents, scratches, and rust, ensuring that the frames maintain their appearance and functionality over time. This durability reduces the need for frequent repairs or replacements.

3. Energy Efficiency

Cost and Environmentally Friendly: By improving energy efficiency, these frames contribute to lower heating and cooling costs, offering long-term savings. Additionally, their energy-efficient design supports environmental sustainability by reducing energy consumption.









